


## AQUAFORCE LOW VOLTAGE CONTROL SCHEMATIC 400, 450, 500

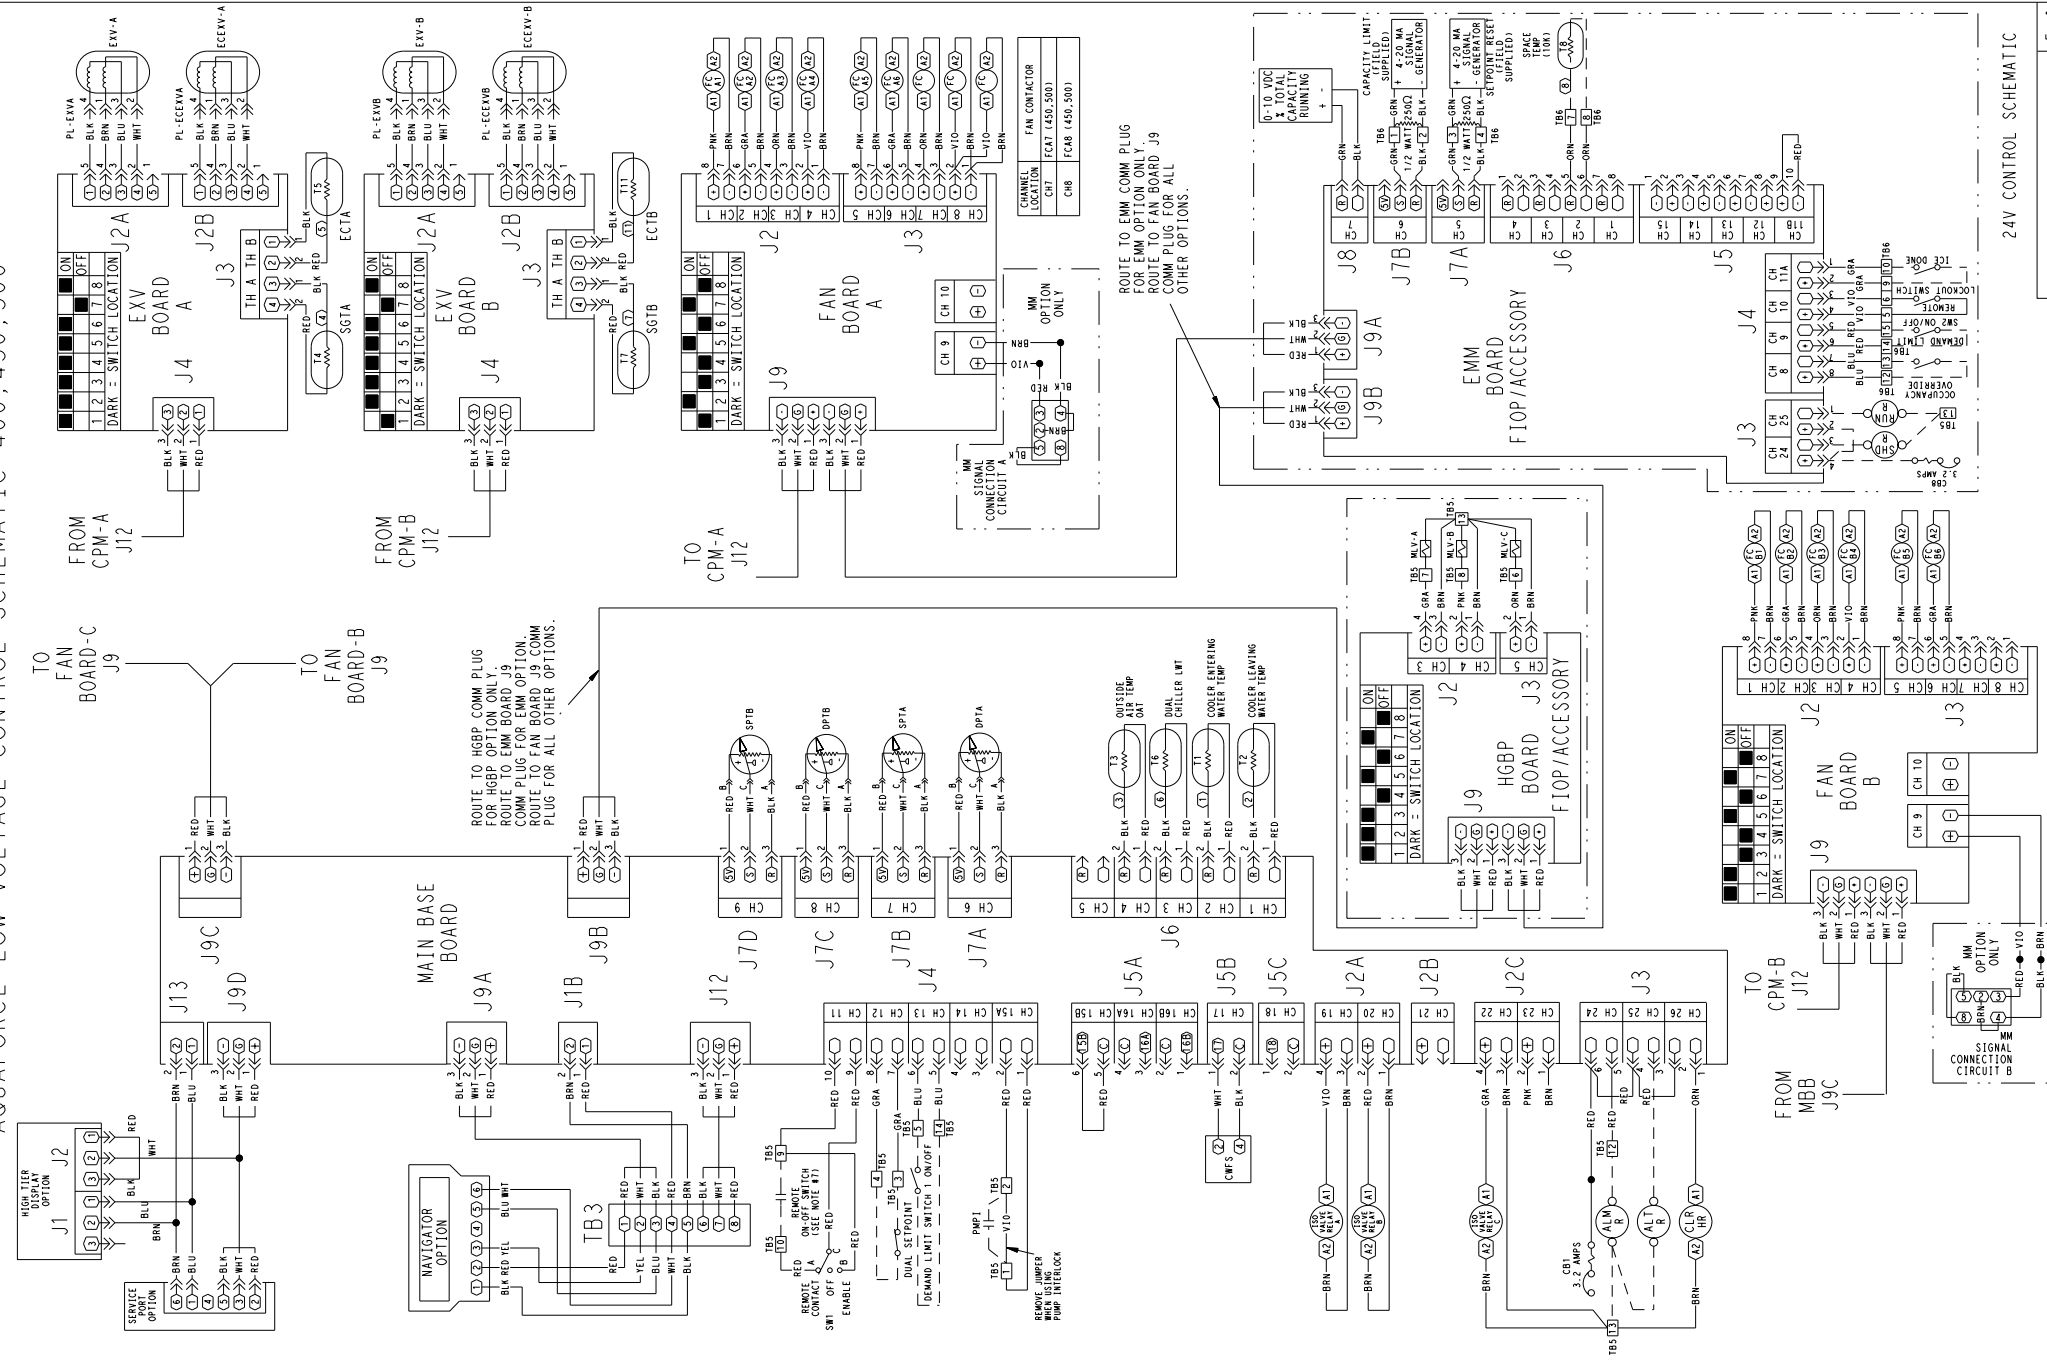

### 24V CONTROL SCHEMATIC

00PSN500140800A	5.0
-----------------	-----

Supplier:	Standard Register or Engineering approved alternate.
Material:	Material for label must comply with Carrier Spec. LF31-83B
Adhesive:	Permanent
Size:	Inner border printed at 8.5 x 11 in.
Shelf Life:	1 Year Minimum
Temperature:	-30° to 150° F
Life:	When continuously exposed to moderate outdoor conditions, the printed labels must maintain satisfactory adhesion and be legible for at least 10 years.
Color:	Black

REV: 5.0	DATE: 02/14/06
Added Hi-Tier Display & HGBP board wiring.	
Revise EXV wire colors.	
Change CB1 to CB8 on Emm CH24 wiring.	